

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Cooper, et al.

Serial No.: 09/689,722

Filed: October 13, 2000

For: Method Of Making A Cosmetic Cover



Art Unit: 1732

#4/BM  
#4/51407

CLAIM OF PRIORITY

Assistant Commissioner of Patents  
Washington, DC 20231

Sir:

Applicant for the above-identified application, by his attorney, hereby claims the priority date under the International Convention of United Kingdom Patent Application No. 9924384.2, filed October 15, 1999, and acknowledged in the Declaration of the subject application. A certified copy of the Application is attached.

Respectfully submitted,

CLARK & BRODY

By

A handwritten signature in cursive script, appearing to read "Conrad Clark".

Conrad J. Clark  
Reg. No. 30,340

1750 K Street, NW, Suite 600  
Washington, DC 20006  
Telephone: 202-835 1111  
Facsimile: 202-835-1755  
Docket No.: 70272-0057  
Date: April 16, 2001





INVESTOR IN PEOPLE




The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

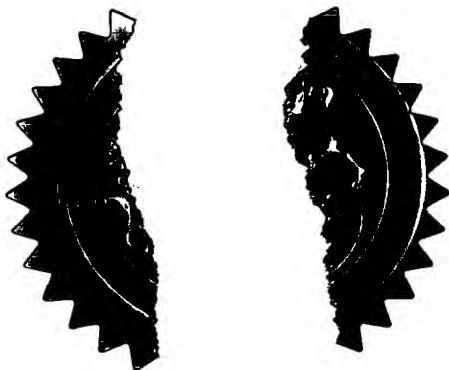


Signed *AmBrewer*.

Dated 24 October 2000



Patents Form 1/77

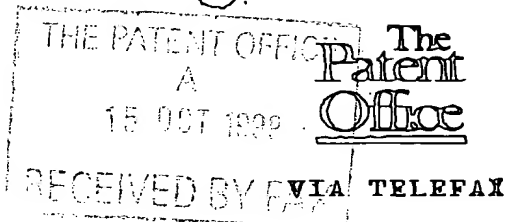Patents Act 1977  
(Rule 16)

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

## 1. Your reference

DJC/AM-RSL

## 2. Patent application

(The

9924384.2

15 OCT 1999

15OCT99 E484352-1 D02808

P01/7700 0.00 - 9924384.2

## 3. Full name, address and postcode of the or of each applicant (underlining all surnames)

RSL Steeper Ltd,  
Riverside Orthopaedic Centre,  
51 Riverside,  
Medway City Estate,  
Rochester, Kent ME2 4DP

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

7761240001

## 4. Title of the invention

A method of making a cosmetic cover

## 5. Name of your agent (if you have one)

Bromhead &amp; Co

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

19 Buckingham Street,  
London WC2N 6EF

Patents ADP number (if you know it)

455039

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application


Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicants named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

Patents Form 1/77



9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 2 x 6

Claim(s)

Abstract

Drawing(s) 2 x 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Bromhead & Co.

15/10/99

12. Name and daytime telephone number of person to contact in the United Kingdom

David J. Crouch  
020-7976 1022

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

-1-

**A method of making a cosmetic cover**

The present invention relates to a method of making a cosmetic cover comprising coating the interior of a mould with successive layers of one or more curable materials.

Such a method has already been proposed in which each layer contains different pigments at different loadings to produce the desired overall colouring for the cover.

One disadvantage of a cover made by such a method is that the colouring is not very realistic.

It is an aim of the present invention to obviate this disadvantage.

Accordingly, the present invention is directed to a method as set out in the opening paragraph of the present specification, in which at least an outer such layer is provided with means to create a non-homogeneous colour effect in that layer, and at least an inner such layer is provided with means to create a background colour, for the said outer layer, in the said inner layer.

It will be appreciated here that the outermost layer of the cover is the layer which is first-formed in the moulding.

The total number of layers with which the interior of the mould is coated may be three or more.

The said one or more curable materials may comprise a liquid monomer. Alternatively, or in addition, the said one or more materials may comprise a semi-liquid

-2-

monomer.

The said means to create a non-homogeneous colour effect may be in the form of coloured lengths of fibres. Alternatively, they may comprise a variation in the thixotropy of the said one or more curable materials. Alternatively, the means to create a non-homogeneous colour effect may comprise dye-containing capsules having a form which will allow the passage of dye material within them into the layer during or after the curing process. Thus, the passing of the dye into the layer from the capsules may be caused by the curing process itself, or alternatively for example upon the exposure of the layer to sunlight.

Alternatively, such dyes could be introduced as solids, such as powders or crystals, or liquids directly into the layer.

The dyes used might be sensitive to light, such as for example polychromatic dyes.

The present invention extends to a method of making a coloured layer of material comprising introducing a dyestuff in a curable or cured layer to provide a non-homogeneous coloured layer.

The present invention also extends to a method of making a coloured layer of material comprising varying the thixotropy of one or more curable materials from which such a layer is made, thereby to produce a non-homogeneous colour effect in the layer.

An example of a method of making a cosmetic cover in

-3-

accordance with the present invention is illustrated in the accompanying diagrammatic drawings, in which:

Figure 1 shows an elevational perspective side view of apparatus for effecting the method; and

5 Figure 2 shows an axial sectional view of a product of that method.

Figure 1 shows an elongate mould 10 with a closed generally hemispherical base 12 held on an axis of a rotary drum 14 by means of foam packing 16 between the  
10 walls of the drum 14 and the mould 10. The mould 10 has an outer open end 18 projecting beyond front end faces 20 of the foam packing 16. To assist in the insertion of the mould 10 in the foam packing 16 within the drum 14, the drum is in two halves, which are hinged together and  
15 which are held in a closed position by means of toggle clamps 22.

Around the periphery of the drum 14 at its forward end, there is a toothed drive ring 24 engaged by a toothed wheel 26 of a drive roller 28. The drum 14 is  
20 also supported by an idle roller 30 spaced apart horizontally from the drive roller 28.

A probe 32 extends axially within the mould 10 to feed warm air into the interior thereof, which enters the probe 32 from a tube 34 connected to a source of warm air  
25 (not shown).

When the apparatus is used, the mould 10 outside the drum 14 is filled with a curable silicon fluid. The mould 10 is then emptied, the viscous nature of the

-4-

silicon fluid being such as to leave a coating on the interior of the mould 10.

The latter is then placed in the foam packing 16 of the drum 14 as shown in Figure 1 and the drum 14 is  
5 rotated by the drive roller 28 about the axis of the drum, as shown by the arrow a in Figure 1. Simultaneously, hot air is fed through the hose 34 into the probe 32, from which it exits into the interior of the mould 10. Eventually, hot air along with the solvent  
10 vapour of the silicon fluid escapes through the open end 18 of the mould 10. During this process strongly coloured short-length fibres are fed into the interior of the mould 10. This may be accomplished through the same probe 32. It produces a non-homogeneous colour effect in  
15 the layer thus formed. Eventually, the silicon gels to form a first layer on the interior of the mould 10.

The mould 10 is now removed from the drum 14, and is once again filled with silicon fluid, which again is then tipped out from the mould 10. This further amount of  
20 fluid silicon is dyed uniformly to provide a background colour for the layer already created.

The second layer of silicon is gelled in the same way as the first, by placing the mould in the drum 14, rotating the latter and simultaneously passing hot air  
25 into the interior of the drum 14. The resulting cured silicon layers are then removed from the mould 10. They constitute a cover as shown in Figure 2 having an outer layer 40 and an inner layer 42. The outer layer has a

-5-

non-homogeneous colour effect created by the presence of the non-uniformly distributed fibres 44. The cover 36 also has an inner layer 42 providing a background colour for the outer layer 40. This cover 36 has a realistic skin-like appearance and is therefore particularly suitable for a prosthesis.

In an alternative method of creating such a cover, which will not now be described with reference to any particular Figures in the drawings, a mould like the mould 10 is heated in an oven. It is then removed from the oven and vinyl chloride monomer is poured into the mould. The mould is then emptied and the mould with a layer of the monomer on its interior, is replaced in the oven.

Either just before or during the heating of this layer of monomer, brightly coloured short-length fibres are scattered on to this layer so as to produce a non-homogeneous colour effect in that layer.

Once the layer of monomer has polymerised to become polyvinyl chloride, the mould is removed from the oven and a further amount of vinyl chloride monomer is poured into the mould to fill the latter. The liquid monomer is again tipped out so that the second layer of the monomer is left on the polymerised layer. This second layer is uniformly covered with a dye to create a background cover for the first layer. The mould is then re-inserted into the oven and the second layer is polymerised. Once the curing process is complete, the cover is removed from the

-6-

mould and, although it is made of a different substance, looks substantially the same as the cover shown in Figure 2.

Numerous variations and modifications to the illustrated method may occur to the reader without taking the resulting method outside the scope of the present invention. For example, there may be three or more layers altogether in the finished cover, providing there is at least one outer layer having a non-homogeneous colour effect, and at least one inner layer providing a background colour. Further printing may be applied on the exterior of the cover 36 shown in Figure 2 to enhance the overall colouring effect even further. Alternatively, further colouring could be injected into the surface of the cover 36 to this end.

The fluid silicon or vinyl chloride monomer and resulting cured material in the layer 40 itself has no pigment loading, or a very low pigment loading, the final colouring effect in the layer 40 being effected substantially solely by the strongly coloured short fibres 44 in these examples.

Materials other than polyvinyl chloride may be used to create the layers. Silicon or polyurethane could be used.

Curing of the monomer may be by chemical means rather than by heating.

The mould 10 may be of a different shape, and may comprise more than one part.

1/2

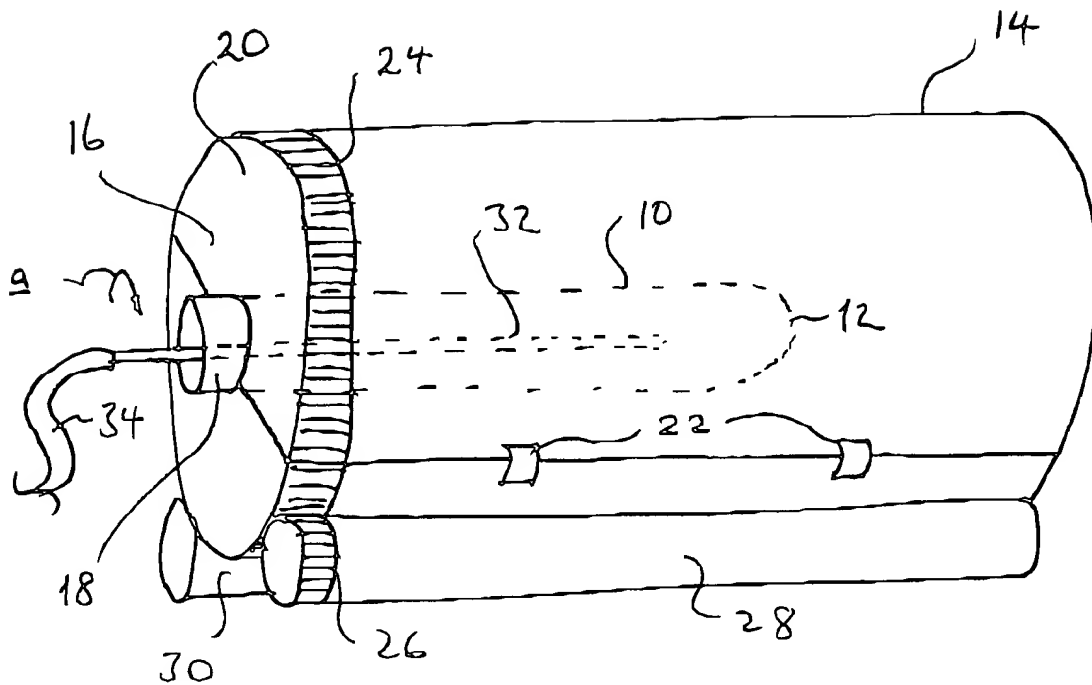


Fig. 1



2/2

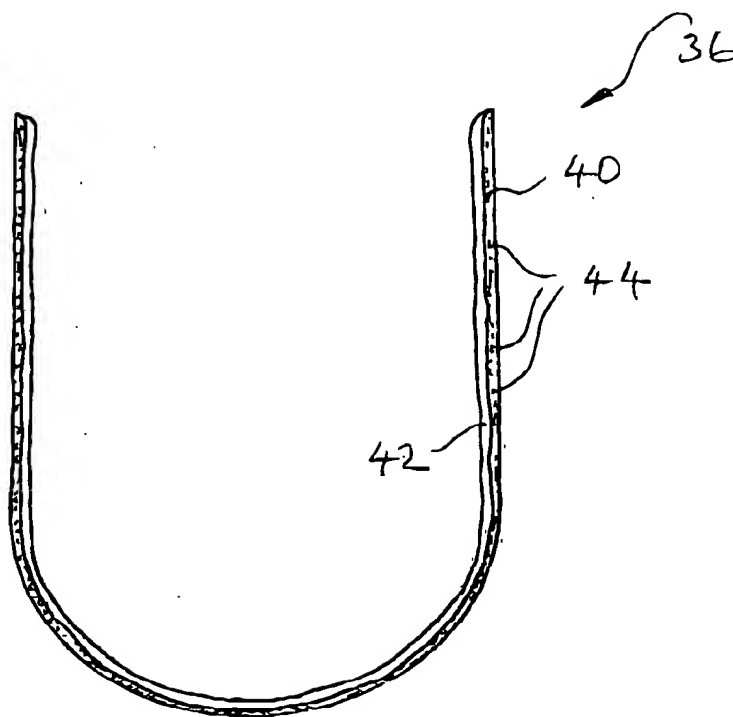


Fig. 2

